


JZXX-RLCA

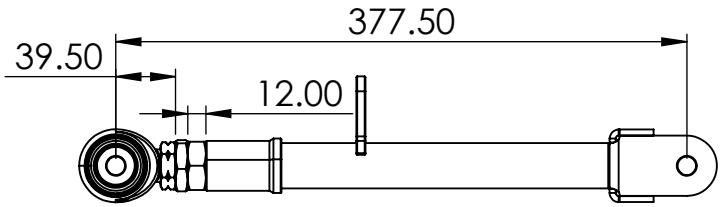


MIN ADJUSTMENT

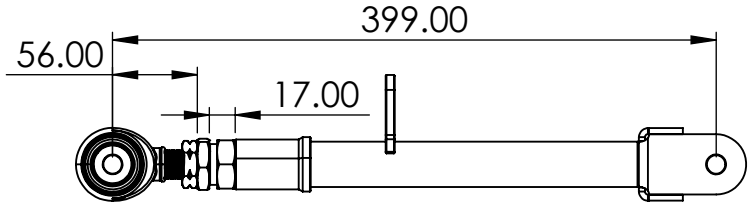

OEM ADJUSTMENT

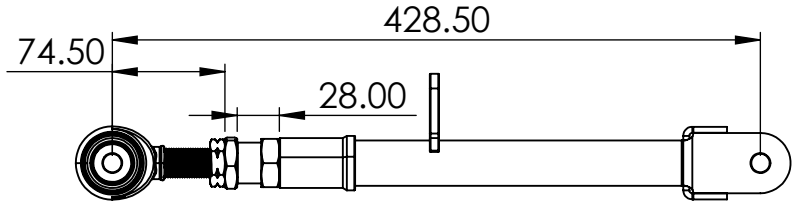


MAX ADJUSTMENT

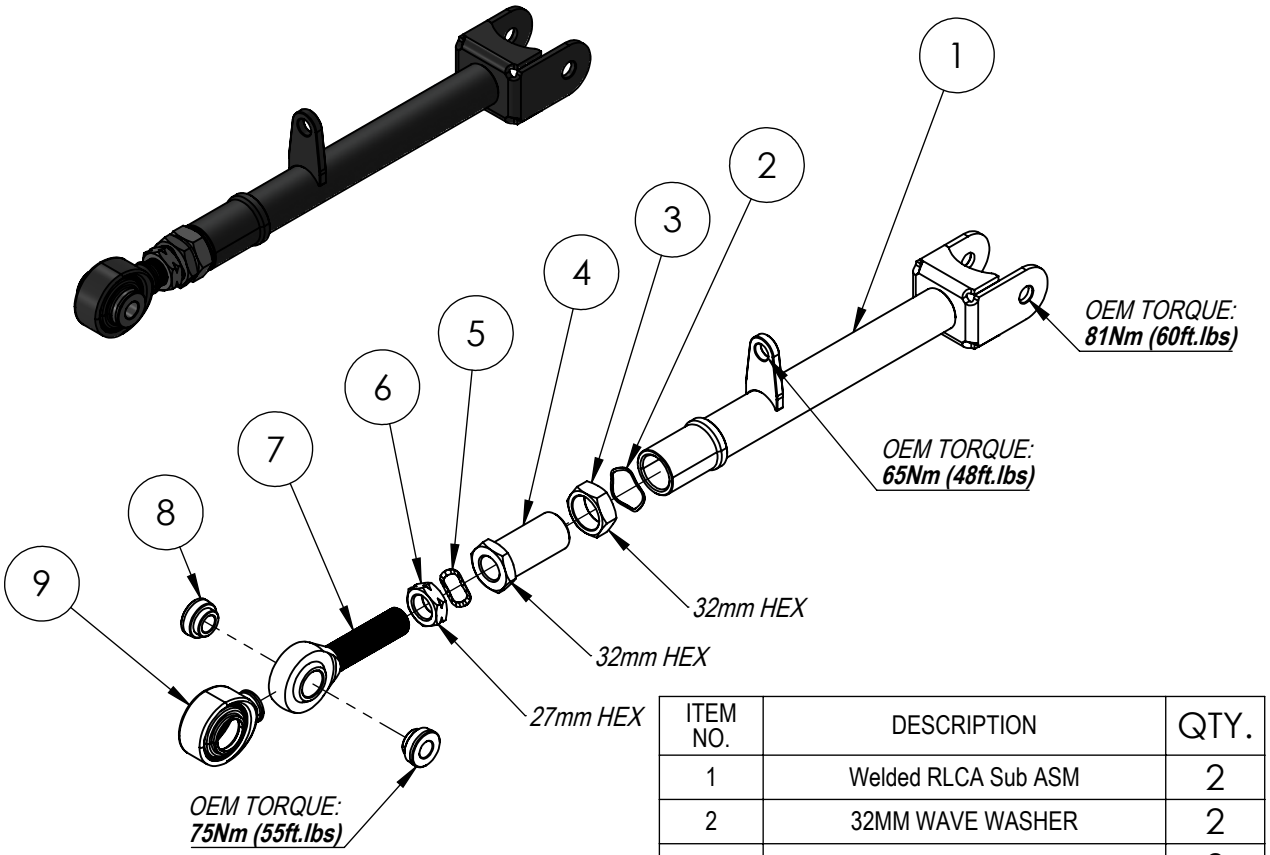

CRITICAL!

CHECK FOR ROD END BEARING ALIGNMENT
AFTER TIGHTENING THE ADJUSTING MECHANISM
ROD END TO BE PERPENDICULAR TO THE SPACERS



ITEM NO.	DESCRIPTION	QTY.
1	Welded RLCA Sub ASM	2
2	32MM WAVE WASHER	2
3	M27x2 JAM NUT	2
4	VERNIER SLEEVE M27x2 EXT, 3/4-16 UNF LH INT	2
5	27MM WAVE WASHER	2
6	NUT 3/4-16 UNF 3B L/H	2
7	PCML12T-ES	2
8	PCXX12T SPACER 12.2 x 39.00 - LM	4
9	PCMX12T BOOT	2

gktech.com