




**MIN LENGTH - 415MM**

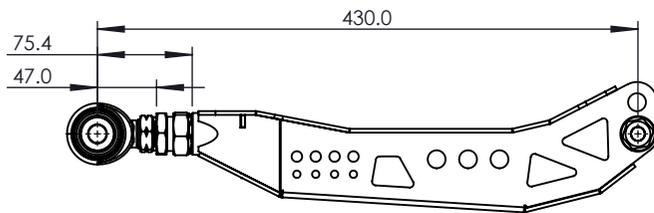

**OEM LENGTH - 430MM**

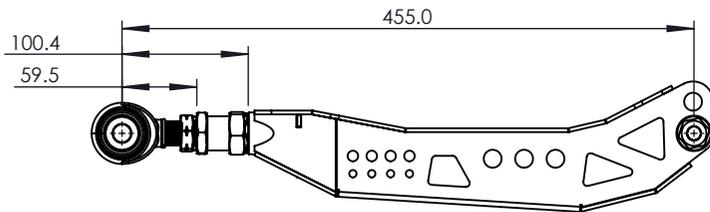

**MAX LENGTH - 455MM**

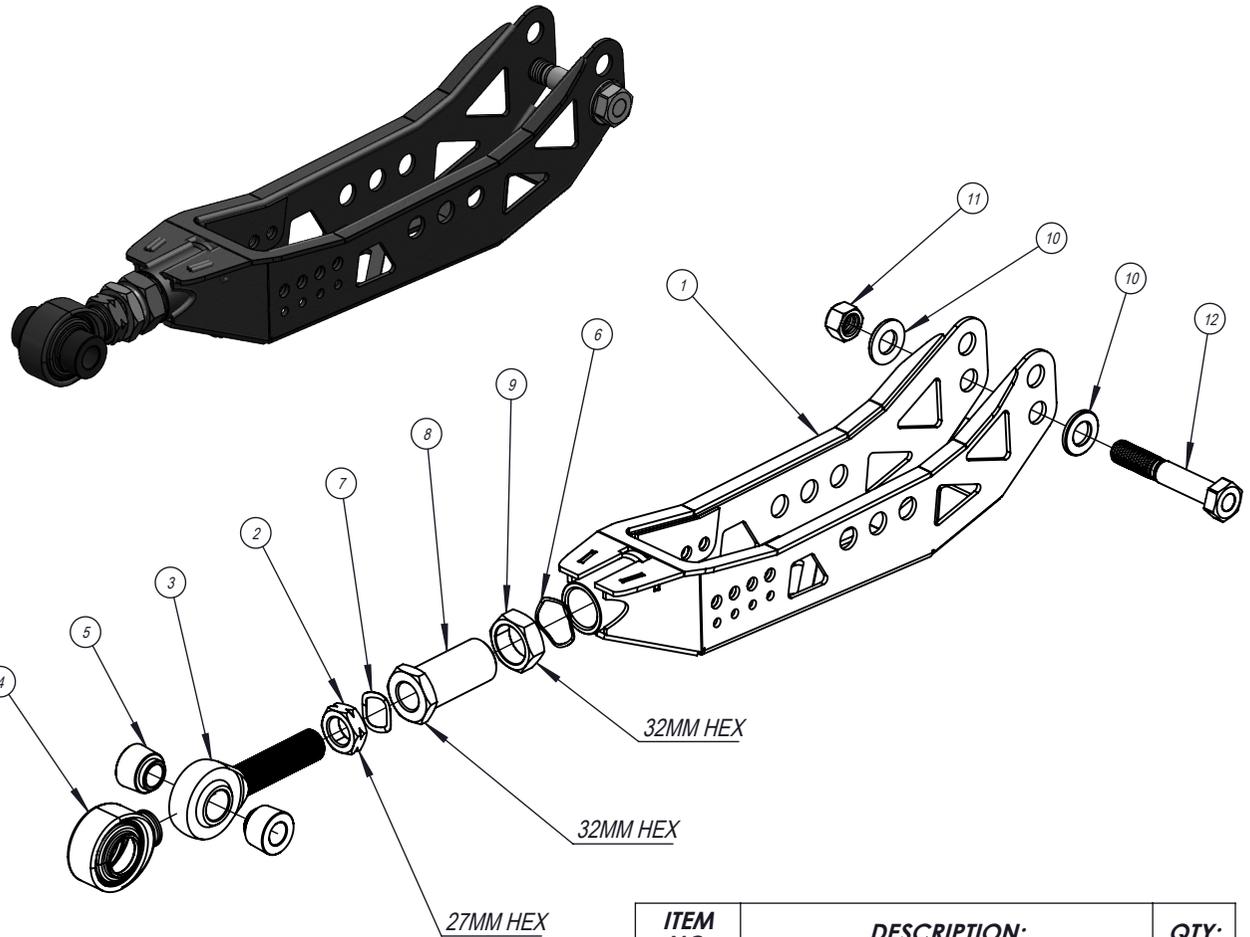

ITEM NO.	DESCRIPTION:	QTY:
1	WELDED LOWER TRAILING ARM	1
2	NUT 3/4-16 UNF 3B L/H	1
3	PCML12T-ES	1
4	PCMX12T BOOT	1
5	SPACER PCMX12T - 14ID-54W	2
6	32MM WAVE WASHER	1
7	27MM WAVE WASHER	1
8	VERNIER SLEEVE M27X2 EXT, 3/4-16 UNF LH INT	1
9	M27X2 JAM NUT	1
10	DIN 6916, M14 WASHER	2
11	ISO CLASS 8, METAL LOCKING NUT	1
12	DIN 931, HIGH-STRENGTH CLASS 10.9 STEEL HEX HEAD SCREW	1

## CRITICAL!

CHECK FOR ROD END BEARING ALIGNMENT AFTER TIGHTENING THE ADJUSTING MECHANISM  
ROD END TO BE PERPENDICULAR TO THE SPACERS

